




PF52 Conveyors

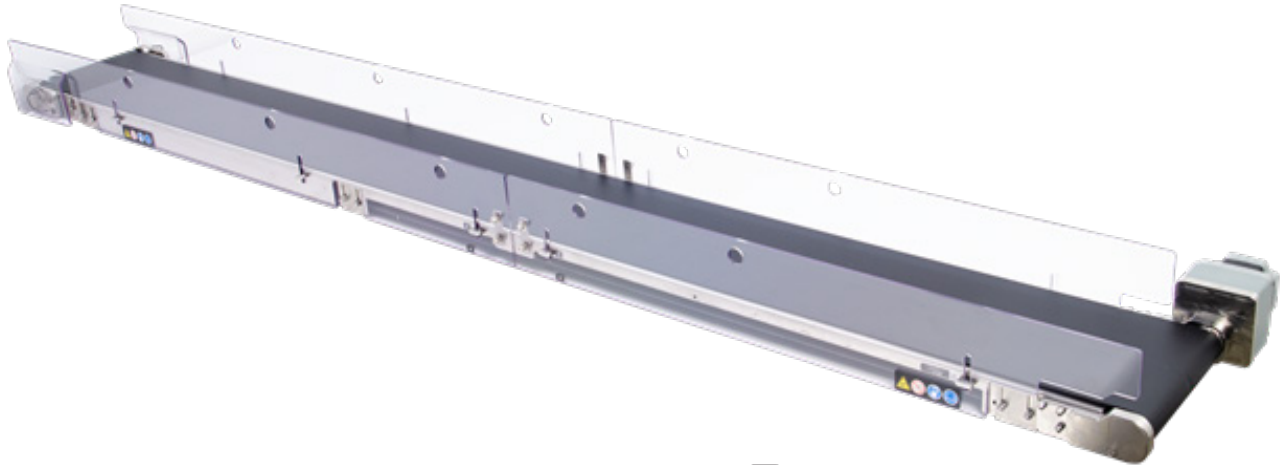

» Specifications

- » 200 watt IP66 protected CE marked Brushless DC Gearmotor
- » Full speed range from .04 to 2 meters/sec [5 – 396 FPM]
- » 70 dB_A at 600mm sound level in free field environment
- » Set to run drive-pushing or pulling
- » Weight: 73 lbs.
- » NSF Certified


» Part Numbers

P
F
5
2
C
 -
 2
5
0
 -
 L
L
L
L
 -
 U
V
K
 -
 A
A
A

QC Specification	Width	Overall	Application
Number		Length (mm)	Identifier

Requires Control Panel (PF52C-EPANEL-AAA-230-1)

» Drawings

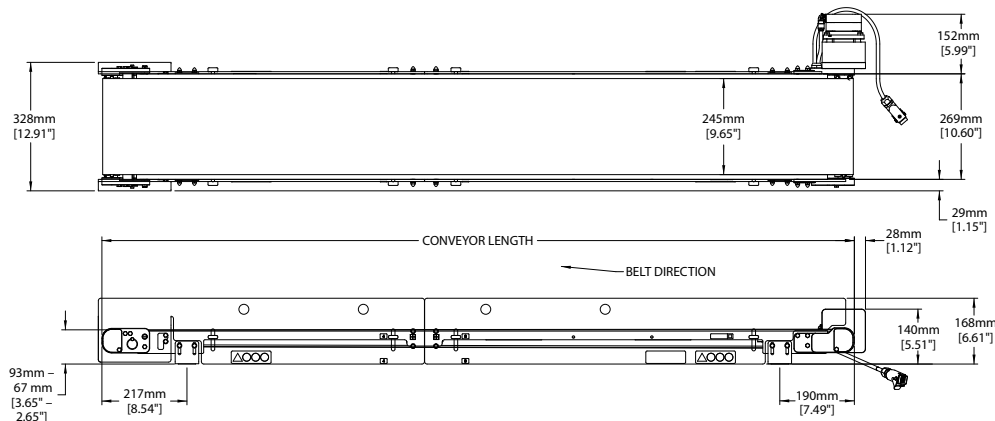

» Features & Benefits

- » **Modular single connection** which is single color-coded, watertight, and ensures the correct connection to the control panel
- » **Clear, hand removable side rails** and open side frame for easy cleaning
- » **Sensors disable conveyors** when side rails are removed
- » **Stainless steel construction** to operate wet or dry
- » **Toolless flip-up tail** relieves belt tension quickly
- » **Sealed stainless steel ball bearings** with covers ensure long life and protection from contaminants
- » **Low profile** with adjustable mounts allows clearance under the conveyor and precise transfers
- » **V-Guided Belt** provides stable guide for belt position after maintenance or cleaning
- » **Precise tension adjustment** is hidden during normal operation allowing for precise tuning for quiet operation
- » **Direct drive gearmotor** saves space and has fewer moving parts than a coupled or underslung design